

Automatic Sliding Door  
**GT1175**  
with Opus Control



## Now with On-board Programming Opus Controller

- Great for Airports & Transportation, Grocery & Retail, Healthcare, Hospitality, Malls, and many other applications
- Integral flush-glazed framing enhances the entrance appearance
- Large urethane door rollers for smooth and long-lasting operation


# GT1175 with Opus Control

The standard for smooth operation and quiet, whisper-like performance

The NABCO GT1175 with Opus Control is engineered to withstand challenging environmental and weather conditions. The ultra-quiet, high-performance GT1175 operator is the right solution for every automatic sliding door entrance.

## GT1175 with Opus Control Header

Header cover is pre-wired for sensor installation and uses extra-thick aluminum extrusions to minimize deflection.

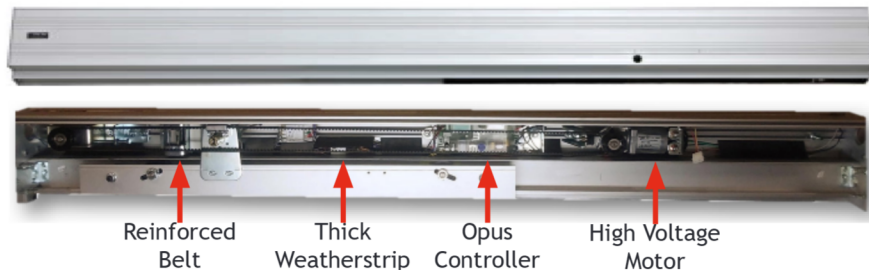

Product Information	
Header dimensions - standard	6 1/2"W (165.1) x 7 1/2"H (190.5)
Standard finish	Clear and dark bronze anodized
Optional finishes	Painted, clad, special anodized
Mounting	Concealed and surface-applied
Threshold Options	Surface-applied, recessed, none
Configurations	Single, bi-part / full breakout, fixed sidelite
Transom	Optional

Selection Guide			
Door Type	Frame Width	Door Opening	Breakout Opening
Single FSL	7' (1930) - 9' (2743)	36" (914) - 48" (1219)	39" (990) - 51" (1295)
Single FBO			76" (1930) - 100" (2794)
Bi-part FSL	10' (3048) - 18' (5486)	48" (1219) - 96" (2438)	54" (1371) - 102" (2590)
Bi-part FBO			104" (2642) - 200" (5080)

Technical Information	
Operator drive	Electro-mechanical
Drive system	Belt drive
Motor type	1/4 HP (peak) brushless
Primary circuit protection	Breaker
Controller	Microprocessor
Breakout	System disabled when panels break out
Operating voltage	120 VAC - 5 AMP
Auxiliary power output	12 VDC, 750 mA
Maximum door panel weight	600 lbs.
Switch modes	On/off, 1-way, 2-way, hold-open, night
Opening and closing speed	Adjustable
Reduced opening function	Standard
Obstacle detection	Available in both directions
Hold-open time	Adjustable

Code Compliance / Approvals	
Code compliance	ANSI A156.10
Approvals	UL, ULC and CSFM

## NABCO Service and Specifications

Along with the NABCO factory branches, NABCO has the largest independently owned network of automatic door distributors in north America. Their friendly, qualified installers and technicians always strive to exceed your expectations from install to after-sales service. AAADM-certified technicians at NABCO's branches and independent distributors ensure our doors meet all ANSI A156.10 standards. Complete three-part specifications and CAD drawings are available on [NABCOentrances.com](http://NABCOentrances.com).



Member of the **Nabtesco** Group



NABCO Entrances Inc.  
582 W18717 Gemini Drive | Muskego, WI 53150  
[nabcoentrances.com](http://nabcoentrances.com) | [info@nabcoentrances.com](mailto:info@nabcoentrances.com)  
P 877-622-2694 | F 888-679-3319

Distributed by: